

Radial Lead Varistor (MOV)

25D Series

Description

The 25D series radial leaded varistors provides an ideal circuit protection solution for lower DC voltage applications by offering higher surge ratings than ever before available in such small discs.

The maximum peak surge current rating can reach up to 20KA (8/20 μ s pulse) to protect against high peak surges, including indirect lightning strike interference, system switching transients and abnormal fast transients from the power source.

Feature

- ◆ Wide operating voltages ranging from 130Vrms to 1000Vrms
- ◆ Fast response time of less than 25ns, instantly clamping the transient over voltage.
- ◆ High surge current handling capability.
- ◆ High energy absorption capability.
- ◆ Low clamping voltages, providing better surge protection
- ◆ Low capacitance values, providing digital switching circuitry protection.
- ◆ High insulation resistance, preventing electric arcing to the adjacent devices or circuits.

Applicable

- ◆ Transistor, Diode, IC, Thyristor or Triac semiconductor protection.
- ◆ Surge protection in consumer electronics.
- ◆ Surge protection in industrial electronics.
- ◆ Surge protection in electronic home appliances, gas and petroleum appliances.
- ◆ Relay and electromagnetic valve surge absorption.

Part Numbering

25 - D - XXX - K - X - X - X

(1) (2) (3) (4) (5) (6) (7)

(1) Size(mm) : 05mm to 32mm

(2) Type : D: Disk, S: Square

(3) Varistor Voltage : 821K (820V)

(4) Tolerance : K \pm 10%, L \pm 15%, M \pm 20%

(5) Lead Form : P: Straight, C: Crimped, I: Inner, Y: Y kink E: 4KV2KA S: 6KV/3KA Y: 10KV/5KA J: High Surge & High Energy

Taping Mode : TA : Ammo, TR : Reel

(6) Short leg : NO : X.X

(7) Coating : H: Epoxy Coating 125



Material

- ◆ Coating: Epoxy Resin
- ◆ Lead Wire: The Copper Wire
- ◆ Electrode: Silver Solder
- ◆ Disk: Zinc Oxide

General Characteristics Definition

- ◆ Operating Temperature: -40 $^{\circ}$ C ~ +85 $^{\circ}$ C
- ◆ Storage Temperature: -40 $^{\circ}$ C ~ +125 $^{\circ}$ C
- ◆ Working Surface Temperature: +115 $^{\circ}$ C
- ◆ Insulation Resistance: > 100M Ω
- ◆ Coating (Epoxy Resin): Flame-Retardant to UL 94 V-0

Radial Lead Varistor (MOV)

25D Series


Electrical Characteristics (@ 25°C Unless Otherwise Specified)

Part Number		Maximum Allowable Voltage		Varistor Voltage	Withstanding Surge Current 8/20 μ S		Max Clamping Voltage		Maximum Energy (10/1000 μ s)	Rated Power	Capacitance
Standard	High Surge	V _{AC} (V)	V _{DC} (V)	V _{1mA} (V)	I(A) Standard	I(A) High Surge	V _C (V)	I _P (A)	(J) High Surge	(W)	@1KHZ (pF)
					1 Time	1 Time					
25D201K	25D201KJ	130	170	200(185-225)	15000	20000	330	150	190	1.2	3200
25D221K	25D221KJ	140	180	220(198-242)	15000	20000	360	150	200	1.2	2900
25D241K	25D241KJ	150	200	240(216-264)	15000	20000	395	150	220	1.2	2650
25D271K	25D271KJ	175	225	270(243-297)	15000	20000	455	150	255	1.2	2400
25D301K	25D301KJ	190	250	300(270-330)	15000	20000	505	150	275	1.2	2100
25D331K	25D331KJ	210	275	330(297-363)	15000	20000	550	150	295	1.2	1900
25D361K	25D361KJ	230	300	360(324-396)	15000	20000	595	150	300	1.2	1750
25D391K	25D391KJ	250	320	390(351-429)	15000	20000	650	150	330	1.2	1600
25D431K	25D431KJ	275	350	430(387-473)	15000	20000	710	150	360	1.2	1500
25D471K	25D471KJ	300	385	470(423-517)	15000	20000	775	150	380	1.2	1400
25D511K	25D511KJ	320	415	510(459-561)	15000	20000	845	150	400	1.2	1250
25D561K	25D561KJ	350	460	560(504-616)	15000	20000	920	150	440	1.2	1150
25D621K	25D621KJ	385	505	620(558-682)	15000	20000	1025	150	450	1.2	1050
25D681K	25D681KJ	420	560	680(612-748)	15000	20000	1120	150	460	1.2	950
25D751K	25D751KJ	460	615	750(675-825)	15000	20000	1240	150	510	1.2	850
25D781K	25D781KJ	485	640	780(702-858)	15000	20000	1290	150	530	1.2	830
25D821K	25D821KJ	510	670	820(738-902)	15000	20000	1355	150	570	1.2	800
25D911K	25D911KJ	550	745	910(819-1001)	15000	20000	1500	150	620	1.2	700
25D102K	25D102KJ	625	825	1000(900-1100)	15000	20000	1650	150	685	1.2	650
25D112K	25D112KJ	680	895	1100(990-1210)	15000	20000	1815	150	720	1.2	600
25D152K	25D152KJ	900	1200	1500(1350-1650)	15000	20000	2475	150	950	1.2	475
25D182K	25D182KJ	1000	1465	1800(1620-1980)	15000	20000	2970	150	1090	1.2	400

Radial Lead Varistor (MOV)

25D Series

Part Marking

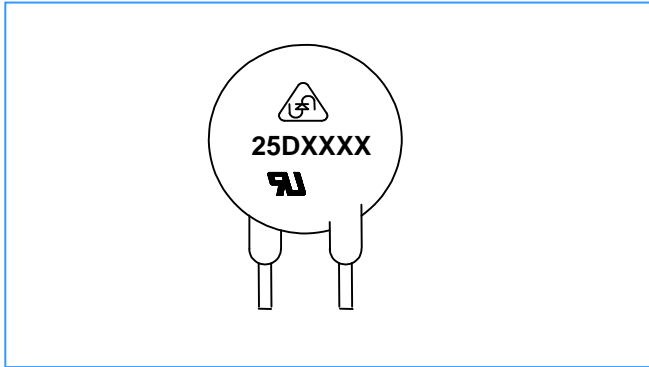

Marking	
Trademark	UN
Part No.	25DXXXXK
Standard for Safety	UL

Packaging Information

Unit:Pcs

Dimension	Part No.	Bag	Small Carton	Carton
25D	201K to 182K	100	500	1000

Package Dimensions Unit: mm





TABLE1

Symbol	Dimensions
H(max.)	31.0
H1(max.)	28.0
L(min.)	20.0
L1(min.)	15.0
D(max.)	27.0
D1(±0.8)	10.0
T(max.)	TABLE2
d(±0.05)	1.0
d1(±0.4)	1.4

TABLE2

Model	T(max.)	Model	T(max.)
201K	4.1	102K	7.8
221K	4.2	112K	8.5
241K	4.3	122K	11.0
271K	4.5	182K	12.5
301K	4.7	-	-
331K	4.8	-	-
361K	5.0	-	-
391K	5.1	-	-
431K	5.3	-	-
471K	5.6	-	-
511K	5.8	-	-
561K	6.2	-	-
621K	6.4	-	-
681K	6.4	-	-
751K	6.5	-	-
781K	6.8	-	-
821K	7.2	-	-
911K	7.6	-	-

Radial Lead Varistor (MOV)

25D Series

Reliability Test (Mechanical Ratings)

Test Parameter	Test Condition / Description		Performance Requirements	
Terminal Pull Strength	After gradually applying the load specified below and keeping the unit fixed for ten seconds, the terminal shall be visually examined for any damage.	Diameter	Loading	No visible damage
		0.6mm	1.0 Kg	
		0.8mm	1.0 Kg	
Terminal Bending Strength	The unit shall be secured with its terminal kept vertical and the weight specified below be applied in the axial direction. The terminal shall gradually be bent by 90° in one direction, then 90° in the opposite direction, and again back to the original position. The damage of the terminal shall be visually examined.	Diameter	Loading	No visible damage
		0.6mm	0.5 Kg	
		0.8mm	0.5 Kg	
Vibration	The Specimen shall be vibrated by its lead wires with a total amplitude of 1.5mm and a varying frequency of 10~55~10HZ(each minutes) for a period of 2 hours respectively in each X,Y and Z directions.	1.0mm	1.0 Kg	No visible damage $\Delta VB/VB\% \cong \pm 5\%$
Soldering-solder ability	After dipping the terminal to depth of approximately 3mm from the specimen in a soldering bath of 260°C for 10±1(D5: 5±1) seconds. Thereafter the terminal shall be visually examined.			Terminations shall be uniformly tinned
Soldering-Resistance to Solder Heat	After preheating the specimen, the specimen shall be completely immersed into a soldering bath having a temperature of 260±5°C for 10±1 (D5: 5±1) seconds or iron of 400±5°C for 3±0.5 seconds. There after the change of Vb and mechanical damage shall be examined.			No visible damage $\Delta VB/VB\% \cong \pm 5\%$

Radial Lead Varistor (MOV)

25D Series

Reliability Test (ENVIRONMENTAL RATINGS)

Test Parameter	Test Condition / Description				Performance Requirements
Dry Heat Loading	The specimen shall be applied continuously the maximum allowable voltage at the specified conditions for specified period and then stored at room temperature and normal humidity over 2 hours. Thereafter, the change of Vb and mechanical damage shall be examined. Ambient temp: 125±2°C ; Period: 1000±24hours.				$\Delta VB/VB\% \leq \pm 10\%$
High Temperature Storage	In a drying oven without load. Ambient temp: 125±2°C ; period: 1000±24hours				$\Delta VB/VB\% \leq \pm 5\%$
Damp Heat Loading	The Specimen shall be vibrated by its lead wires with a total amplitude of 1.5mm and a varying frequency of 10~55~10HZ(each minutes) for a period of 2 hours respectively in each X,Y and Z directions.				$\Delta VB/VB\% \leq \pm 10\%$
Temperature Cycle	Condition the specimen to each temperature form step 1 to step 4 in this order for the period shown in the table of specifications. The change of Vb and mechanical damage shall be examined after 2 hours.	Step	Temp°C	Period	No visible damage $\Delta VB/VB\% \leq \pm 10\%$
		1	-40±3°C	30 min.	
		2	Room Temp	15 min.	
		3	85±2°C	30 min.	
Surge Lifetime Rating	The change of Vb shall be measured after the impulse listed below is applied 10,000 times continuously with the interval of ten seconds at room temperature.Vb and mechanical damage shall be examined.				No visible damage $\Delta VB/VB\% \leq \pm 10\%$
	Voltage: 2500VAC Leakage Current $\leq 0.5\text{mA}$ Time: 60 Seconds				No Breakdown